




MODI MULTIBIT 2

DIGITAL TO ANALOG CONVERTER

IN NORSE MYTHOLOGY, MODI WAS ONE OF THOR'S SONS.
HERE, MODI MULTIBIT 2 IS ONE OF SCHITT'S MODIS.
IT'S THE MOST AFFORDABLE MULTIBIT DAC WE MAKE.
BUT STILL WITH ALL THAT COMBOBURRITO GOODNESS!

OWNER'S MANUAL

CONNECTIONS

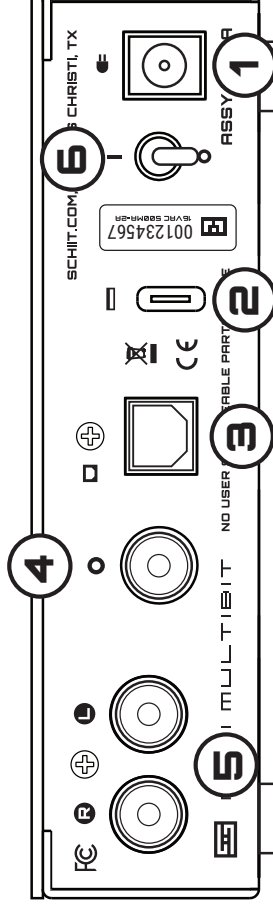

1 Power Input. Connect the supplied 16VAC wall-wart here. Modi Multibit 2 uses a 500mA-2A, 14-16V AC power adapter. It does not run on DC, which are what most adapters output.

2 USB Input. Connect your USB source to the Modi Multibit's USB-C input with a quality USB cable, not more than 2 meters long.

3 Optical Input. Connect your optical source to the optical input jack, using a quality Toslink cable, 3 meters or less in length.


4 Coaxial Input. Connect your coax digital source to the coax input jack, using a good RCA cable.

5 Analog Output. Connect the two RCA jacks, to your preamplifier, receiver, or integrated amplifier, using a good-quality RCA cable pair.

For USB, select Modi Multibit 2 as the output device in Control Panel (Windows) or System Preferences (Mac) AND in your music player software.

6 Turn it on and enjoy your music!

CONTROLS

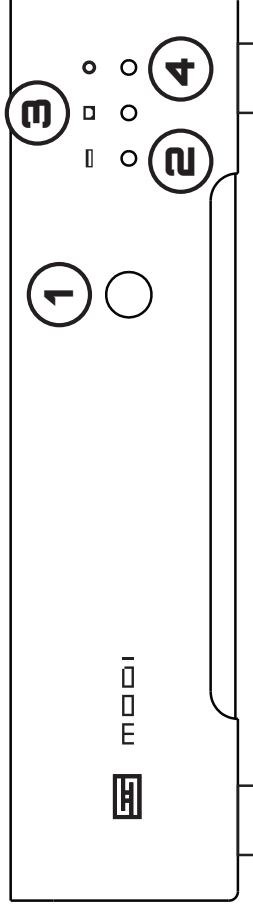

1 Input Select. Press the button to cycle through the three digital inputs—USB, optical, and coax. Press and hold to go into NOS mode.

2 USB Input. This light turns on when you've selected a USB source.

3 Optical Input. This light turns on when you've selected an optical source. Simple enough.

4 Coax Input. This light turns on when you've selected a coaxial digital source. But you already knew that.

Note: Modi Multibit 2 flashes all three lights (2, 3, and 4) in sequence for about 20 seconds after you first turn it on to prevent any thumps, bumps, or other weird noises. Once the lights stop flashing, you're ready to use Modi Multibit 2.

Another Note: When in NOS mode, the selected input light will slowly pulse.

And that's it. This is a really simple device. Why don't you have a listen now?

2-YEAR LIMITED WARRANTY

Schitt Audio warrants to the original purchaser that this product shall be free from defects in material and workmanship for two (2) years from the date of purchase. If a defect covered by this warranty occurs during this period, Schitt Audio will repair the defective product, free of charge. Date of purchase will be based on customer receipt, otherwise date of manufacturing will be used.

If you believe you need warranty service, contact us first. Schitt Audio products sent back to us without a Return Authorization (RA) will be returned to the sender without repair. To contact us and obtain an RA, email info@schitt.com.

Warranty Limitations. This warranty shall not apply if a product: (a) is modified or tampered with; (b) is damaged by negligence, accident, unreasonable use, or other causes unrelated to defective materials or workmanship; or (c) has had the serial number altered or removed.

Any implied warranties, including warranties of merchantability and fitness for a particular purpose, are hereby limited in duration to the warranty period of 2 years. In no event shall Schitt Audio be liable for consequential or incidental damages resulting from the breach of any implied or expressed warranties. Some states do not allow these limitations, so they may not apply to you. You may also have other rights which vary from state to state or province to province.



Application for Council Directives 72/23/EEC, 89/336 EEC
Conformity declared for EN60065, EN55022 Class B, EN55082-1



This equipment has been tested and found to
comply with the limits for a Class B digital device,
pursuant to part 15 of the FCC Rules.

IN THE BOX

- (1) Modi Multibit 2
- (1) Wall-Wart



SCHITT

SCHITT.COM
INFO@SCHITT.COM